





Questions, problems, missing parts?

Before returning to your retailer, call our customer service at 1-800-527-1292
Monday – Friday 8:30 a.m. – 5:00 p.m. CST

PACKAGE CONTENTS

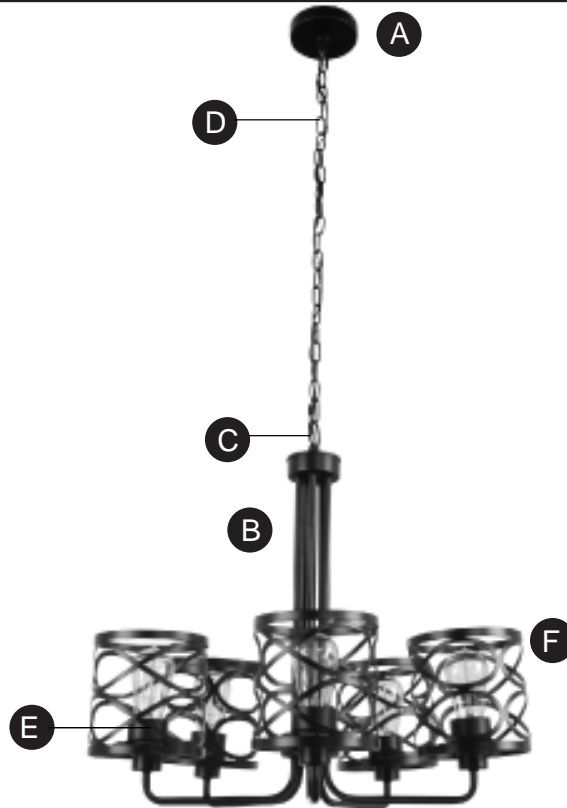

HARDWARE CONTENTS Note: Hardware not shown actual size.

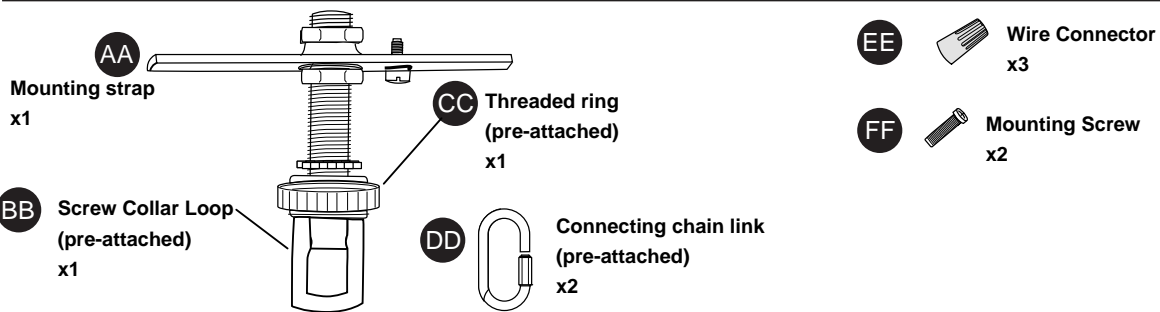

⚠ IMPORTANT REMINDER: You must use the parts provided with this fixture for proper installation and safety. **⚠**

medium base bulbs required:
5 x 60 watt max. A19 incandescent bulbs
or 13 watt max. SBCFL/SBLED bulbs
(bulbs sold separately)



Intertek

PRINTED IN CHINA

SAFETY INFORMATION

READ AND SAVE THESE INSTRUCTIONS.

Please read and understand this entire manual before attempting to assemble, operate or install the product.

WARNING

- To reduce the risk of electrical shock, turn off the electricity at the main fuse box or circuit panel before you begin the installation or before servicing or installing the fixture.
- To reduce the risk of fire, electrical shock or personal injury, wire connectors provided with the fixture are designed to accept only one 12 gauge house wire and no more than two lead wires from the fixture. If your house wire is larger than 12 gauge or there is more than one house wire to connect to the fixture lead wires, consult an electrician for the proper size wire connectors to use.
- To reduce the risk of fire, do NOT allow bulb to come in direct contact with any flammable materials.
- To reduce the risk of damage to the fixture, DO NOT use power tools to assemble any part of the fixture.
- DO NOT suspend any fixture by the house wires. A fixture must always be mounted directly to an outlet box or to a mounting plate which is first attached to the outlet box. Wire connectors will not support the weight of a fixture. Suspending a fixture by the house wires and wire connectors will result in the fixture falling, with the possibility of personal injury and the danger of electrical shock or fire.
- DO NOT connect this fixture to an electrical system that does not provide a means for equipment grounding. Never use a fixture in a two-wire system that is not grounded. Installing a fixture into an electrical system not having a proper grounding means could cause metal parts of the fixture to carry electrical currents if any of the fixture wires, wire connections or splices were to become broken, cut or loose during the mounting or normal operation of the fixture. Under this condition, anyone coming in contact with the fixture would be subject to electrical shock, which could cause serious injury or death.
- DO NOT connect the bare or green insulation fixture ground wire to the black (HOT) current-carrying wire or the white (NEUTRAL) house wire. Connection of the bare or green fixture ground wire to the black or white house wires may cause metal parts of the fixture to carry electrical currents. Under this condition, anyone coming in contact with the fixture will receive electrical shock, which could cause serious injury or death.

CAUTION

1. Make sure all electrical connections comply with Local Codes or Ordinances, the National Electrical Code and ANSI/NFPA 70-1999. If you are unfamiliar with electrical wiring or if the house/building wires are different colors than those referred to in the instructions, please use a qualified electrician.
2. Electrical diagrams are for reference only.
3. DO NOT use bulbs having a wattage greater than the maximum value stated on the fixture. The use of bulbs with higher wattage than specified will increase temperatures and risk of fire.
4. After installation is complete, check that all connections are absolutely secure.
5. Due to the weight of this fixture, it is advisable to seek the help of another person to hold the stepladder in place and to then help lift the fixture up to you once you are set on the ladder.
6. The fixture must be mounted to an outlet box that is supported by the building structure and can support the full weight of the fixture. Use a metal outlet box; plastic outlet boxes are not recommended.

NOTE: The important safety precautions and instructions appearing in the manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense and caution are necessary factors in the installation and operation of this fixture.

PREPARATION


Before beginning assembly, installation or operation of the product, make sure all parts are present. Compare parts with package contents list and diagrams on previous page. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement parts.

Tools Required for Assembly (not included): Flathead Screwdriver, Phillips Screwdriver, Wire Strippers, Pliers or Wrench, Wire Cutters, Safety Glasses, Stepladder, Soft Cloth, Electrical Tape

ASSEMBLY INSTRUCTIONS


1. Turn off circuit breakers and wall switch to the fixture supply line leads.

WARNING: Failure to disconnect power supply prior to installation may result in serious injury.




2. Remove existing fixture.

WARNING: When using an existing outlet box, be sure the outlet box is securely attached to the building structure and can support the full weight of the fixture. Failure to do so can result in serious injury.




3. Attach mounting strap (AA) to outlet box (not included) using the existing screws and washers or the mounting screws (FF) provided in hardware pack.

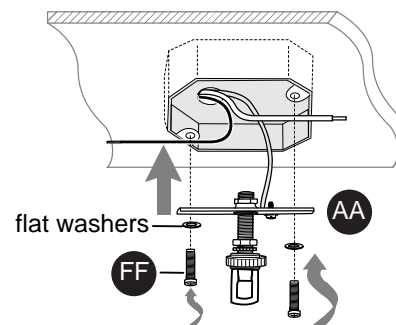

4. Rotate fixture arms so they align with the rods on the fixture (B).

Screw fixture loop (C) onto the decorative fixture (B).


NOTE: If product should become misaligned during shipping, it is possible to manually adjust and realign correctly.

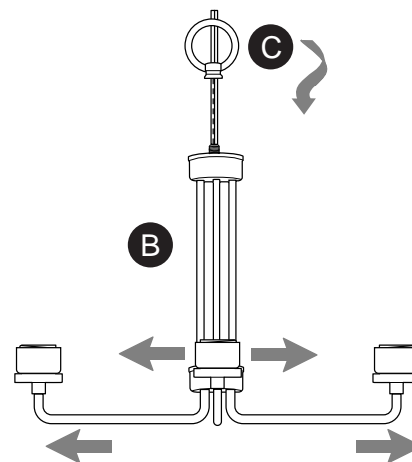


ASSEMBLY INSTRUCTIONS (continued)

- Attach and close connecting chain link (DD) to fixture loop (C). Feed wiring through chain (D) to desired length.


If you will be using the chain as is skip to the following step.
If you wish to SHORTEN the chain remove connecting chain link (DD) from other end of chain (D). Open the chain link at desired length using pliers, a flat-head screwdriver and a soft cloth to prevent scratching the chain. Remove any extra chain and replace connecting chain link (DD).

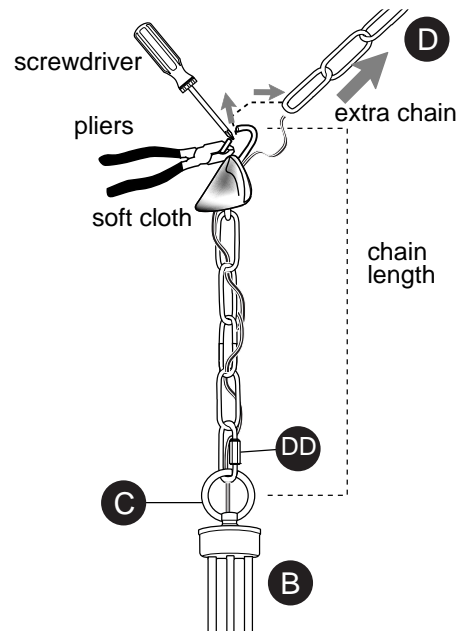

- Unscrew threaded ring (CC) from screw collar loop (BB) and feed through chain (D). Then feed canopy (A) through the chain (D).

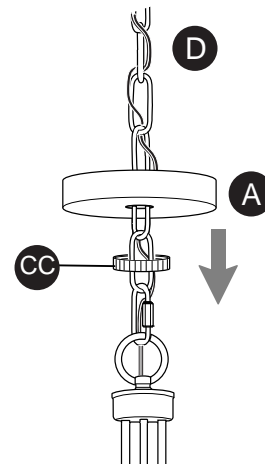

- Lift chain (D) to screw collar loop (BB) and hang chain (D) on connecting chain link (DD). Close connecting chain link (DD).

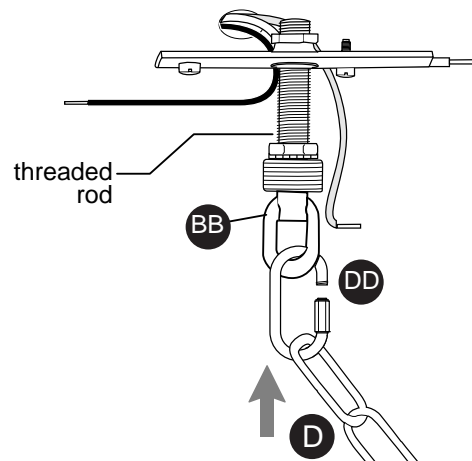

ASSEMBLY INSTRUCTIONS (continued)

8. Prepare wire by stripping 1/2 inch of insulation from wire ends using wire strippers (not included).


Feed wiring and bare GROUND wire through hole at bottom of threaded rod. Gently push wiring and bare GROUND wire until they come through top of threaded rod. Pull all wiring until there is no extra slack left in the wires running through the chain.

Make wire connections with wire connectors (EE) provided as follows: Connect **BLACK** wire from outlet box to **SMOOTH** wire from fixture (C). Connect **WHITE** wire from outlet box to **RIBBED** wire from fixture (C). Attach **GREEN/GROUND** wire from outlet box to **BARE** wire from fixture (B).

NOTE: If the outlet box wiring does *not* have a **GREEN/GROUND** wire, the **BARE** wire from the fixture (C) should be attached to the **GREEN SCREW** (labeled **GND**) on the mounting strap (AA).


Note: Screw wire connectors (EE) on in a clockwise direction.

WARNING: Never connect ground wire to WHITE or BLACK power supply wires.

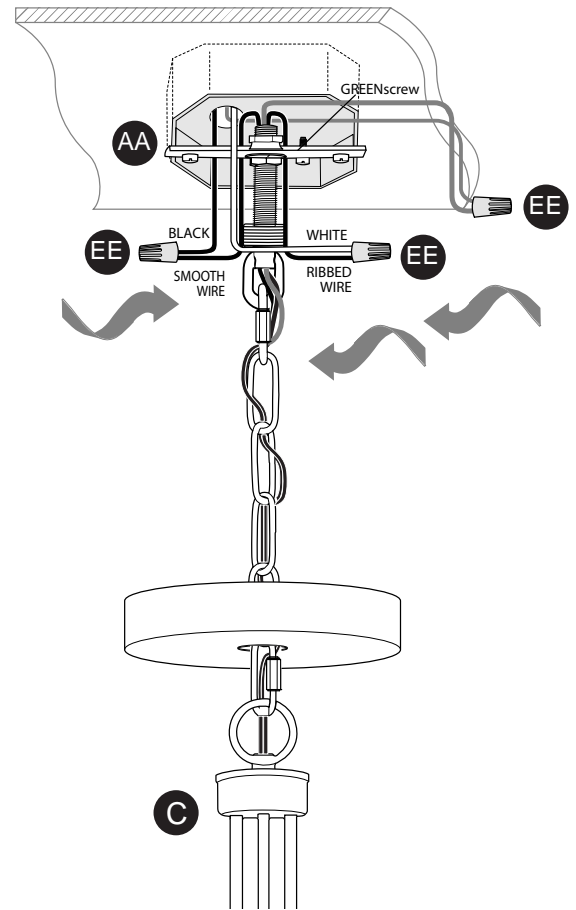


9. Wrap all wire connectors with electrical tape as an extra safety measure.

WARNING: Make sure no bare wire or wire strands are visible after making connections.

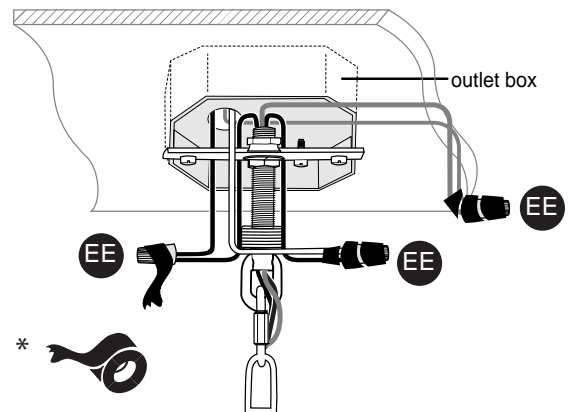

ASSEMBLY INSTRUCTIONS (continued)

10. Gently push wiring into outlet box and then slowly slide canopy (A) and threaded ring (CC) up chain. Secure canopy (A) to mounting strap by tightening threaded ring (CC).

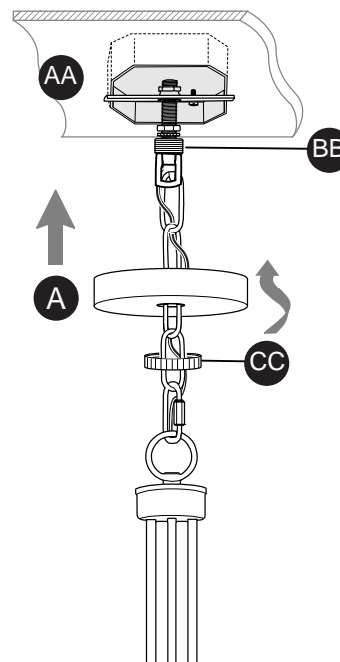


11. Remove socket covers (E) from sockets. Place shade (F) over socket and secure by replacing socket cover (E).

Install 5 medium base bulbs --either 60 watt max. A19 incandescent bulbs or 13 watt max. SBCFL/SBLED bulbs (bulbs sold separately).

IMPORTANT: When replacing bulb, please allow bulb and shade to cool down before touching them.

Restore power and test fixture.

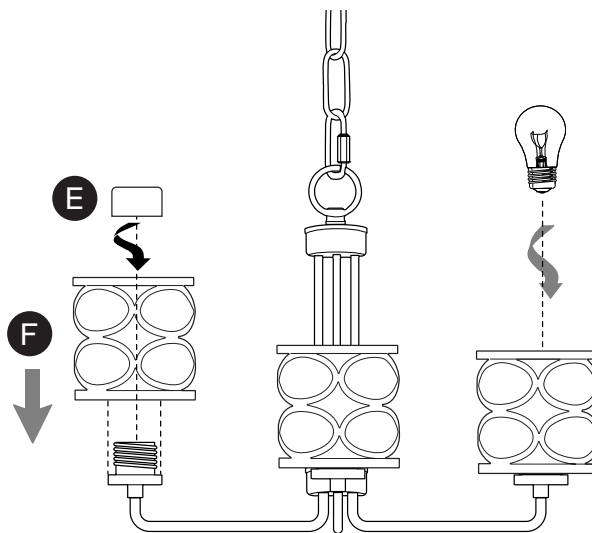

CARE AND MAINTENANCE

- To clean, turn off power and wipe fixture with a damp, non-abrasive cloth.

TROUBLESHOOTING

WARNING: Failure to disconnect power supply prior to troubleshooting any wiring issues may result in serious injury.

Problem: Light(s) does/do not come on.

Solutions:

1. Check power (circuit box and wall switch) to fixture.
2. Verify that bulbs are installed correctly.
3. Check to be sure wires are connected properly with wire connectors.
4. Replace defective bulbs with same type of bulb.

PARTS REPLACEMENT

For parts and information, please refer to "Package Contents" and "Hardware Contents" on page 1.
Customer Service: **1-800-527-1292**

FIVE-YEAR LIMITED WARRANTY: If, during normal use, this PATRIOT LIGHTING® lighting fixture breaks or fails due to a defect in material and workmanship within five (5) years from the date of original purchase, simply bring this lighting fixture with the original sales receipt back to your nearest MENARDS® retail store. At its discretion, PATRIOT LIGHTING® agrees to have the product or any defective part(s) repaired or replaced with the same or similar PATRIOT LIGHTING® product or part free of charge, within the stated warranty period, when returned by the original purchaser with original sales receipt. This warranty; (1) excludes expendable parts including but not limited to light bulbs; (2) does not cover damage that has resulted from abuse or misuse; and (3) does not cover any losses, labor, injuries to persons/property or costs. This warranty does give you specific legal rights and you may have other rights, which vary from state to state.



Questions, problems, missing parts?

Before returning to your retailer, call our customer service at 1-800-527-1292
Monday – Friday 8:30 a.m. – 5:00 p.m. CST